



# Conventional

## Insulated Conventional Roof Curb

1028 Opelika Road,  
Auburn, AL 36830  
Ph: (334) 826-9538  
Fax: (334) 826-9539

Customer: \_\_\_\_\_ Project: \_\_\_\_\_



Ship To: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

### Standard Features:

- Welded 18ga G90 galvanized steel construction
- 14 inches high
- Factory installed PT 2x2 wood nailer
- Supplied closed cell neoprene gasket
- Weld seams painted
- 1.5"x3# density rigid fiber glass insulation

### Options (please check):

- Heavier gauge metal
- 5052-H32 AL or 304 SS construction
- Custom height
- Horizontal duct connections
- Turning vane
- 1" or 2" isolation rails
- Seismic rating/stamped
- Filtration
- Metal Building construction
- Other per customer specs

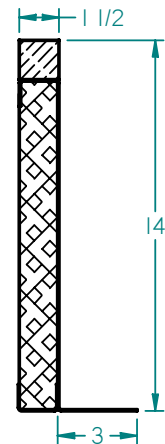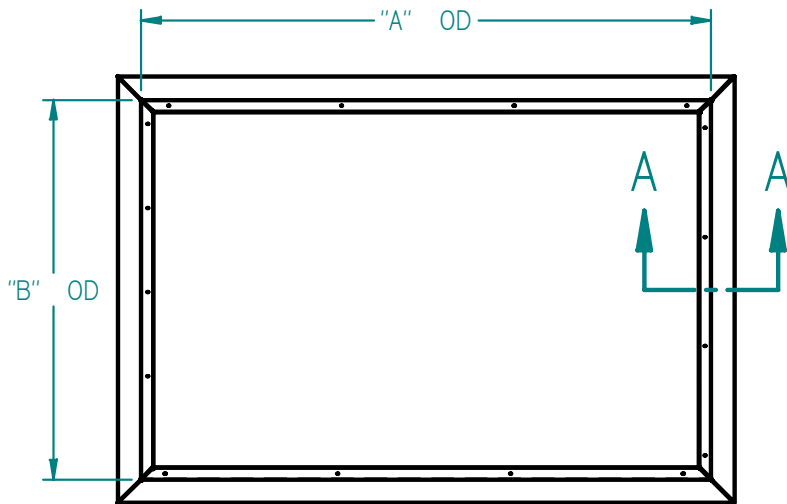

SECTION A-A

QUANTITY	HEIGHT	"A" in.	"B" in.	OPTIONS	SPECIAL NOTES