Conventional

Conventional Roof Curb Insulated With Raised Cant

1028 Opelika Road,
Auburn, AL 36830
Ph: (334) 826-9538
Fax: (334) 826-9539

Customer: _____ Project: _____

Ship To: _____
_____
_____

Standard Features:

- Welded 18ga G90 galvanized steel construction
- 14 inches high
- Factory installed PT 2x2 wood nailer
- Supplied closed cell neoprene gasket
- Weld seams painted
- 1.5”x3# density rigid fiber glass insulation

Options (please check):

- ☐ Heavier gauge metal
- ☐ 5052-H32 AL or 304 SS construction
- ☐ Custom height
- ☐ Horizontal duct connections
- ☐ Turning vane
- ☐ 1” or 2” isolation rails
- ☐ Seismic rating/stamped
- ☐ Filtration
- ☐ Metal Building construction
- ☐ Other per customer specs

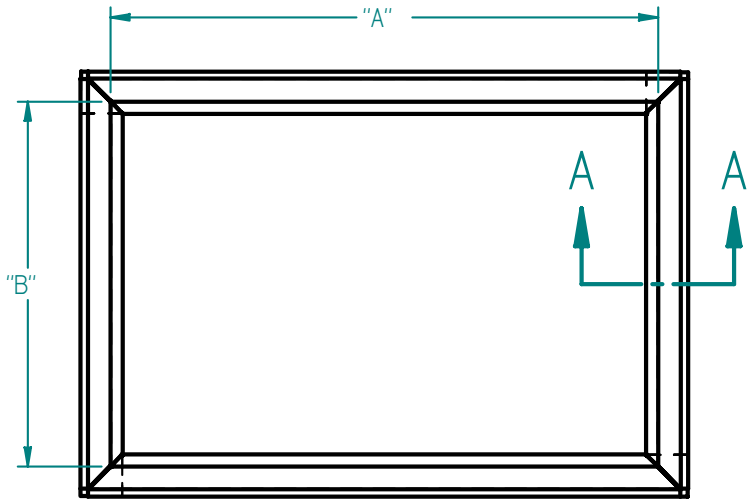

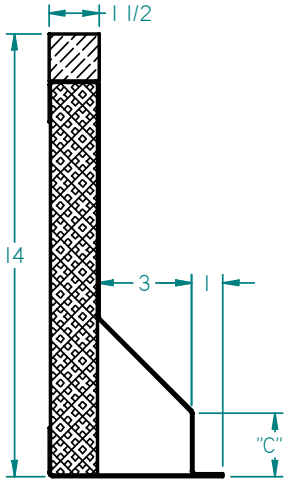

SECTION A-A

QUANTITY	HEIGHT	“A” in.	“B” in.	“C” in.	OPTIONS	SPECIAL NOTES